




CNC4530-II – 4MP H.265+ WDR Weatherproof IR Camera

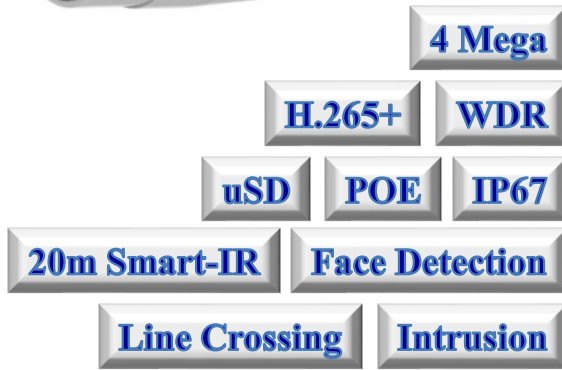

Features

- **4MP** 2560x1440 @25fps
- **H.265+** Compression
- ONVIF compatible
- 4mm Fixed Lens
- 120dB **WDR**, 3D-DNR, DSS
- ROI, Mirror, Privacy Mask
- 10/100 Base-T
- Day&Night by Filter Change
- LED Array, 0 Lux up to 20m
- Support uSD card up to 128GB
- 3-Stream
- Smart : Line Crossing, Intrusion & Face Detection
- IP67 Weatherproof

SPECIFICATION



| Model | CNC4530-II |
|----------------------|--|
| Image Sensor | 1/3" progressive scan CMOS Sensor |
| Resolution (PAL) | 2560x1440 / 1920x1080 @25fps (PAL) |
| Shuttle | 1/3s ~ 1/100,000s |
| Lens | M12 4mm Fixed Lens |
| LEDs | 850nm IR LED Array |
| Day & Night | Filter Change or TDN (True Day & Night) |
| Minimum Illumination | 0 Lux up to 20m |
| Network | 10/100-BaseT, RJ45, 32Kbps ~ 16Mbps |
| Compression | 3-Stream. H.264 / H.264+ / H.265 / H.265+ |
| Working Environment | -30°~+60°C, <90° Humidity (Non-Condensing) |
| Power | POE or 12VDC, Max. 7W (IR-On) |
| Dimension | 60mm(φ) x 140mm(L), 300g |

* Specification maybe changed without prior notice