

IP CCTV Cabling Solution


IPS104P-II – 4-Port PoE Switch



Features

- 4x RJ45 PoE Device Port, 10/100Mbps
- 2x RJ45 Uplink Port, 10/100Mbps
- Standard : IEEE802.3/u/af/at
- PoE Power : Total 60W
- Surge Protection : 6KV
- 50000h MTBF
- Plug and Play
- 48VDC (Adapter Included)
- CCTV Mode :
 - 1) Device Port only talk to Uplink Port
 - 2) PoE Port change to 10Mbps/250m


Connection Diagram

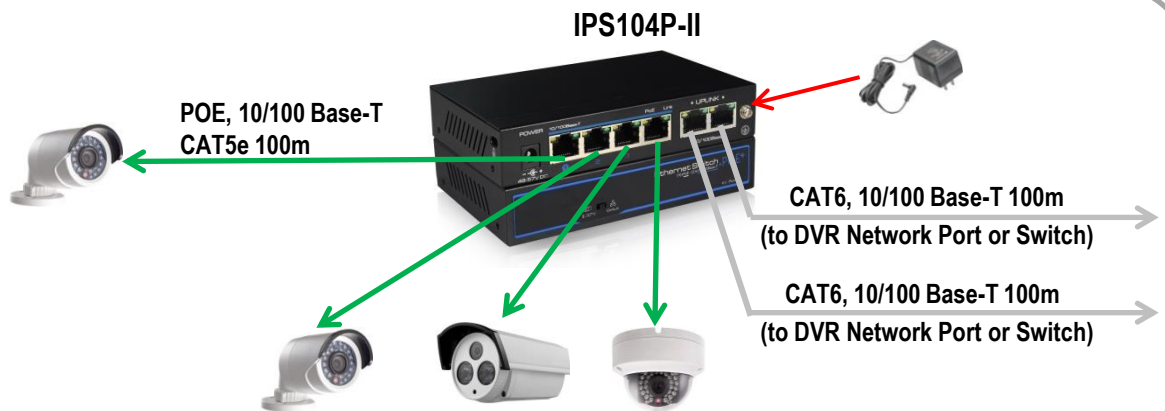

Front board



Back board

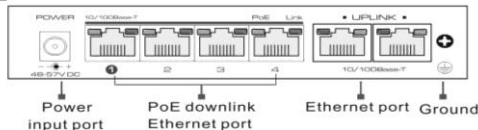

Side board



Specification

- 48~52VDC Input, 60W Max.
- Backbone Bandwidth : Max. 1.0Gbps
- Data Buffer : 768K
- Network Delay : <20uS
- Surge Protection : 6KV, IEC61000.4.5
- Operating Temperature : -10~55°C / Humidity 0~95%
- Galvanized Sheet with Black Epoxy Powder Coating
- Size : 135(W) x85(D) x27(H) mm
- Weight : 300g

* Specification maybe changed without prior notice