



CNC3330-SL – 2M STARLIGHT IR IP Bullet Camera



Features

- 2 Megapixel 1920x1080 @25fps
- **H.264+** Compression
- ONVIF compatible
- **3.6 / 6mm** Fixed Lens
- **STARLIGHT** 0.003LUX w/o LED
- 3D-DNR, **WDR** etc
- 3 ROI, 3-Stream
- Day&Night by Filter Change
- 26nos LED, 0 Lux up to 30m
- Network 10/100 Base-T
- Aluminum Casing with Epoxy
- IP66
- POE / 12VC Dual Power

SPECIFICATION

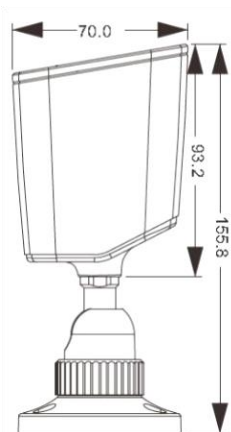

| Model | CNC3330-SL |
|-------------------|---|
| Image Sensor | 1/2.8" progressive scan CMOS Sensor |
| Resolution | 1920x1080 @25fps (PAL) |
| Shuttle | 1/25s ~ 1/100,000s |
| Lens | M12 3.6 / 6mm Fixed Lens |
| LEDs | 2nos 850nm IR LED Array |
| Day & Night | Filter Change or TDN (True Day & Night) |
| Min. Illumination | 0 Lux up to 30m |
| Network | 10/100-BaseT, RJ45 |
| Bit Rate | 256Kbps ~ 5Mbps |
| Compression | 3-Stream : H.266 High Profile / MJPEG |
| W. Environment | -20° ~+50°C, <90° Humidity (Non-Condensing) |
| Power | POE IEEE 802.3af compliant/12VDC, Max. 4W |
| Dimension | 70 x 70 x 156mm(L), 370g |

* Specification maybe changed without prior notice