


N5-3104-5ML-V2 – 4ch 5MP-Lite H.265+ DVR

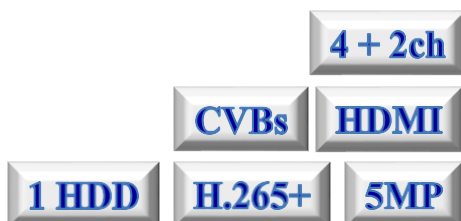

Features :

- **H.265+** Compression – saving 50% HDD space
- Stable & Economical Linux base
- 4 Individual channel auto detect :
 - **Analog** (960H) @Real-time 25fps
 - **AHD/TVI 720p** @Real-Time 25fps
 - **AHD/TVI 1080p** @Real-Time 25fps
 - **5MP** @20fps
- Support **2ch IP Cameras** up to **5MP**
- Full HD 1080p HDMI & VGA output
- **CVBs** output
- **UTC** Camera OSD Control
- Audio : 1-ch In / 1-ch Out
- 4ch Simultaneous Playback
- Simultaneous login **5** users
- Support 1HDD (Max. 10TB)

SPECIFICATION

Model	N5-3104-5ML-V2
Channel	4 Coaxial + 2 IPC (Total 6ch, Max 6 IPC)
Recording	WD1(960x676), 720p(1320x1080), 1080L(1920x540) @25fps/ch 1080p (1920x1080)@12fps/ch , 5MP-Lite (1296x1944)@10fps/ch
Video Out	1xVGA, 1x Full HD 1080p HDMI, 1 CVBs
Access Bandwidth	16Mbps Incoming / 40Mbps Outgoing
Port	2x USB, RS485 (for PTZ control)
Storage	1 SATA HDD (up to 10TB)
Network	10/100 self adaptive RJ45 Ethernet port
Working Environment	-10° ~ +50°C, 10~90% Humidity
Power	12VDC / 1.5A (Adapter Included), <5W w/o HDD
Dimension	255(W) x 42(H) x 222(D)mm, 2kg w/o HDD