



CNC4333 – 2MP H.265+ IR IP Bullet Camera



Features

- 2 Mega Pixels 1920x1080 @25fps
- **H.265+** Compression
- ONVIF compatible
- **4mm** Fixed Lens
- 3D-DNR, DWDR, DSS
- ROI, Mirror, Privacy Mask
- Up to 6 Simultaneous Live View
- Dual Stream, 10/100 Base-T
- Day&Night by Filter Change
- 30m IR Range
- Reset Button
- Support **μSD** card up to 128GB
- Smart : Line Crossing & Intrusion Detection

SPECIFICATION

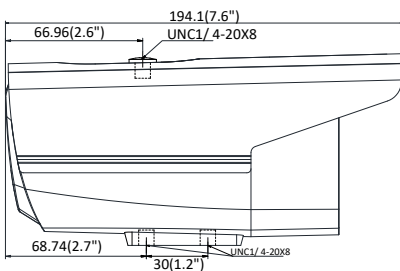

Model	CNC-4333
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1920x1080@25fps (PAL)
Shutter	1/3s ~ 1/100,000s
Lens	M12 4mm Fixed Lens
LEDs	30nos φ5 850nm IR LED
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 30m
Network	10/100-BaseT, RJ45, 32Kbps ~ 16Mbps
Compression	Dual Stream : H.265+ / H.264+
W. Environment	-30°~+60°C, <90° Humidity (Non-Condensing)
Power	POE or 12VDC, Max. 5W (IR-On)
Dimension	94 x 94 x 194mm(L), 680g