



CNC-3630-S – 5MP WDR SMART IR Weatherproof IP Camera



Features

- **5 Megapixel** 2592x1944 @20fps
- **H.265+** Compression
- 3.6mm Fixed Lens, **140dB WDR**
- 3D-DNR, DSS, BLC, HLC, Defog
- 3 ROI Coding, 3-Stream
- Network 10/100 Base-T
- Audio in, CVBs out
- POE / 12VDC Dual Power
- Aluminum Casing
- Smart Functions : **Object Removal, Abnormal Video, Line Crossing, Region Intrusion, People Counting, Crowd Density, Face Recognition**

SPECIFICATION

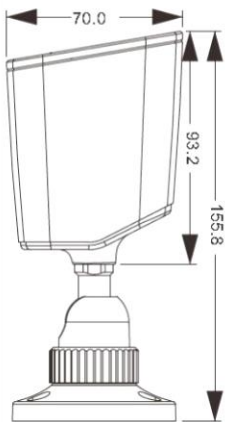

Model	CNC-3630-S
Image Sensor	1/1.8" progressive scan CMOS Sensor
Resolution	2592x1944 @20fps (PAL) 4MP / 3MP / 2MP / 720p @25fps
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	24nos ϕ 4mm 850nm IR LED
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m (Subject to reflection)
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264 / MJPEG
Working Environment	-20° ~ +50°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 3.5W
Dimension	70 x 70 x 156mm(L), 370g