

XC-2610-SL – 5MP 4in1 STARLIGHT WDR IR Dome



5MP 4in1

STARLIGHT

WDR



UTC

IP66

FEATURES :

- 5 Megapixel **STARLIGHT** Sensor - 5x sensitivity than normal sensor
- Video output selectable :
5MP AHD/TVI @20fps
4MP/2MP AHD/TVI/CVI @25fps
700TVL Analog @25fps
- **3.6mm** Fixed Lens
- 0 Lux up to 20m
- 120dB True **WDR**
- 3D-DNR, DSS, Defog etc
- **UTC** & Joystick OSD control
- Aluminum Casing with Sunshield
- Suitable for Wall / Ceiling Mount
- Best performance <300m by RG6

DIMENSION

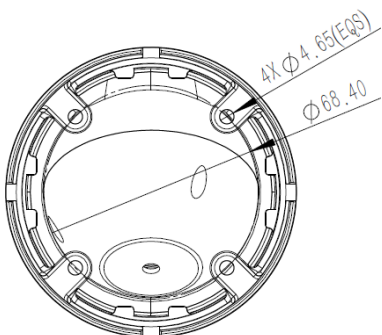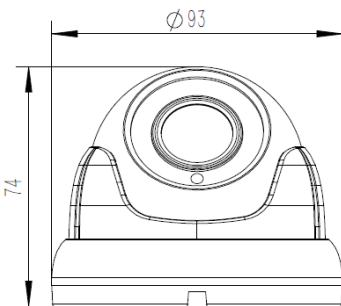

SPECIFICATION

Model	XC-2610-SL
Image Sensor	1/2.8" STARVIS Sensor
Resolution	2560x1936 Pixels
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
Video Output	5MPp@20fps AHD/TVI or Analog
Day & Night	Filter Change or True Day&Night (TDN)
Min. Illumination	0 Lux up to 20m
LEDs	2pcs 850nm IR LED Array
S/N Ratio	>52 DB
Casing	Aluminum with Epoxy Powder Coating
W. Environment	-10° ~ +55°C, Non-Condensing
Power	12VDC, Max. 300mA
Dimension (mm)	93mm(φ) x 74mm(H), 300g