

XC-2634-MSL – 5MP 4in1 STARLIGHT Motorized WDR IR Bullet



5MP 4in1

5x Motorized Zoom

40m IR

STARLIGHT


UTC

WDR

Features

- 5 Megapixel **STARLIGHT** Sensor : 5x sensitivity than normal sensor
- Video output selectable :
5MP AHD / TVI @20fps or
4MP AHD / TVI / CVI @25fps or
700TVL Analog @25fps
- **2.7~13.5mm Motorized AF** Lens
- 0 Lux up to 40m
- **WDR**, DSS, Defog, SMART-IR, etc
- **UTC** & Joystick OSD control
- **Aluminum Casing, IP66**
- Suitable for Wall / Ceiling Mount
- Best performance <300m by RG6

DIMENSION

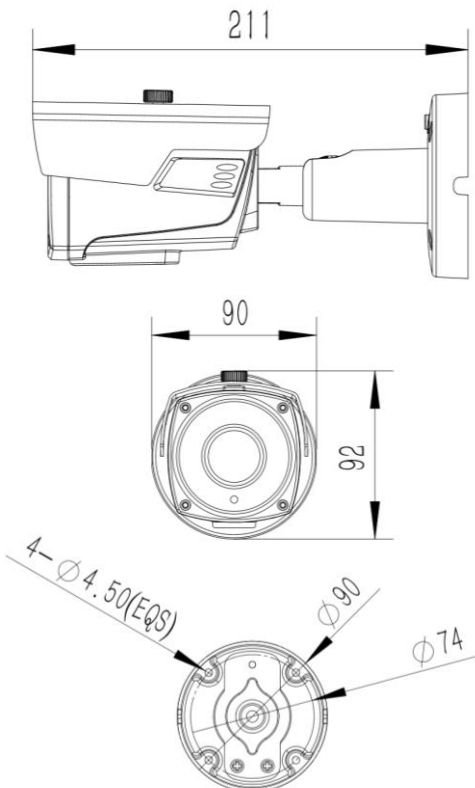

SPECIFICATION

Model	XC-2634-MSL
Image Sensor	1/2.8" STARVIS Sensor
Resolution	5MP 2592x1944 @20fps TVI/AHD 4MP 2560x1440 @25fps TVI/AHD/CVI
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.7-13.5mm Motorized AF Lens
Day & Night	Filter Change or True Day&Night (TDN)
Min. Illumination	0 Lux up to 40m
LEDs	4nos 42u 850nm LED Arrays
S/N Ratio	>52 DB
Casing	Aluminum with Epoxy Powder Coating
W. Environment	-10° ~ +55°C, Non-Condensing
Power	12VDC, Max. 500mA
Dimension (mm)	90mm x 92mm x 211mm(L), 1.4kg