

IGS-416-P200 – 16-Port Full Gigabit POE Switch with SFP




(SFP Fiber Optic Module Not Included)

Features

- **16x 1000Mbps POE** Device Port
- **2x 1000Mbps SFP** Uplink
- **2x 1000Mbps UTP** Uplink
- **40Gbps** switching, **2.75M** Buffer
- POE Protocol : IEEE802.3af/at
- Total POE Power : 180W, Support POE+
- POE power LED indication
- Surge Protection : 6KV, 30000h MTBF
- Web-base POE Management
- CCTV Mode : POE ports only communicate with Uplink port.


Connection Diagram

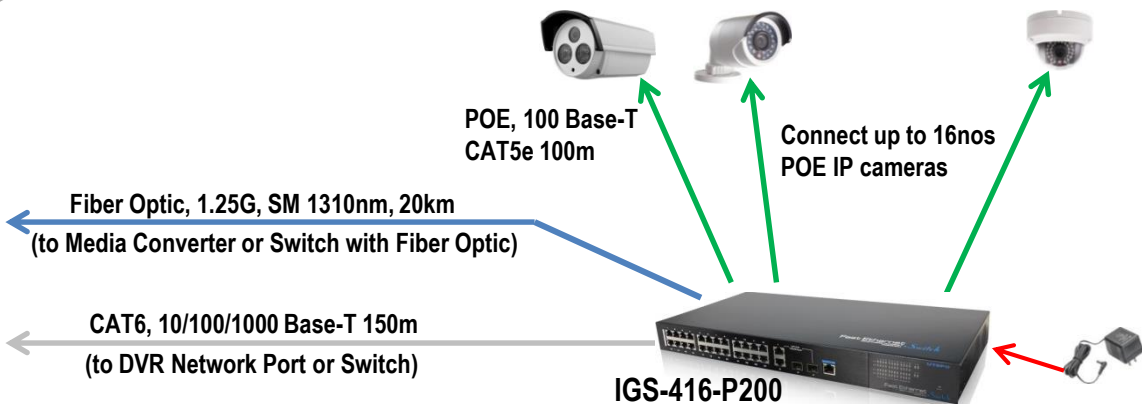

IGS-416-P200

Specification

- 100~240VAC Input, 200W Max.
- Network Standard : IEEE802.3, 802.3u, 802.3ab, 802.3Z
- Packet Transfer Rate : 42Mbps
- MAC Address 8K
- Cache : 4Mb
- Surge Protection : 6KV, IEC61000-4-5
- POE Power Indication : 30%, 60%, 90~100%
- Operating Environment : 0°~45°C / 0~95% Humidity
- Iron Casing with Black Epoxy Powder Coating
- Size : 442(W) x285(D) x44.5(H) mm
- Weight : 4.5kg

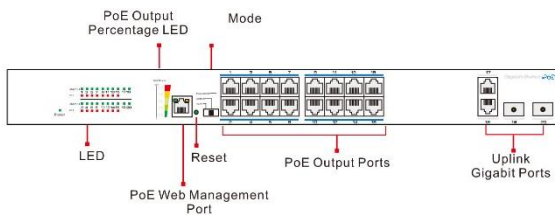

Back panel



* Specification maybe changed without prior notice