



CNC-3532 – 4MP H.265+ IR IP Bullet Camera



Features

- **4 Megapixel** 2688x1520 @25fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- DWDR, BLC, HLC, 3D-DNR
- **ROI**
- 4 Users simultaneous login
- LED Array, 0 Lux up to 20m
- Network 10/100 Base-T
- IP67 Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Intrusion, Object Removal**

SPECIFICATION

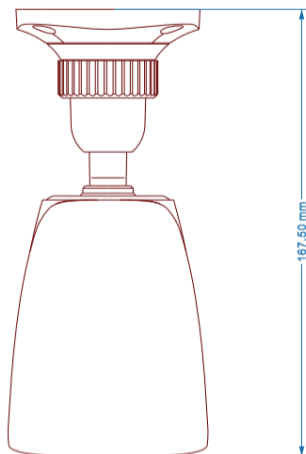

Model	CNC-3532
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	4MP 2588x1520 @25fps 3MP / 2MP / 720p @25fps
Shutter	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	2nos IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af/at or 12VDC, <5W
Dimension	74.5 x 74.5 x 167.5mm(L), 0.39kg