




## CNC-3332-E – 2MP IR IP Bullet Camera

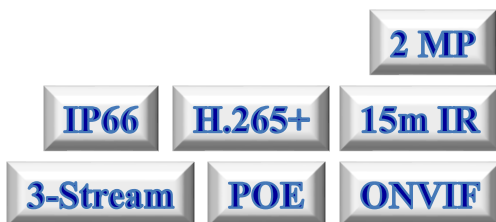

### Features

- **2 Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- DWDR, BLC, HLC, Defog, 3D-DNR
- **ROI**, IP Address Filtering, Video Mask, Illegal Login etc
- 4 Users simultaneous login
- LED Array, 0 Lux up to 15m
- Network 10/100 Base-T
- Half Aluminum Half PVC Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Intrusion, Object Removal**

### SPECIFICATION

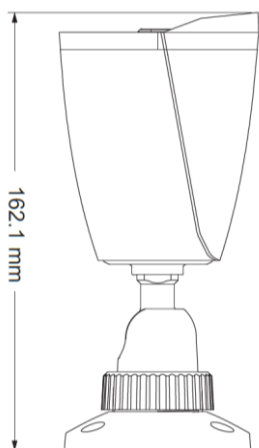

Model	CNC-3332-E
Image Sensor	1/2.9" progressive scan CMOS Sensor
Resolution	2MP 1920x1080 @25fps
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	1no IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 15m
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-20° ~ +55°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <4W
Dimension	162.1 x 74.8 x 73.8mm, 0.24kg