

CNC-335-W18-SLIR : 2MP 18X 100m IR Starlight Network Speedome



2MP

18X

STARLIGHT

H.265+

POE

μSD

100m IR

ONVIF

Features


Camera

- **2 Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- **18x** Optical Zoom
- **Sony STARVIS Sensor**
- Auto-Iris, Auto-Focus
- SMART-IR Range up to 100m
- **μSD** up to 128GB with **ANR**
- **Build-in Heater & Blower**
- Working Environment -30~55°C
- Weatherproof IP66, 4KV Lightning Protection
- Max 80°/s Pan Preset Speed
- Max 80°/s Tilt Preset Speed
- 0.5~80°/s Manual Pan Speed
- 0.5~80°/s Manual Tilt Speed
- 360 Programmable Presets
- 8 Tour (up to 16 presets each)
- 4 Pattern (up to 3min each)
- Smart Functions : **Item Care, Area Intrusion, Line Crossing, Human Detection / People Counting**

Speedome Function

- 3D Positioning
- Power-Off Memory
- Scheduled Task
- Park action
- Privacy Mask

Dimension

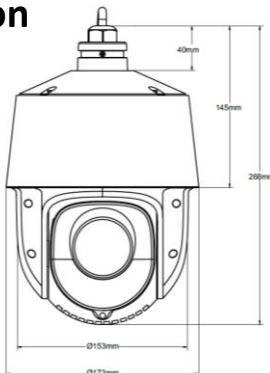

Wall Mount
SM-0808



Ceiling Mount
SM-0807



Pole Mount
SM-0501



Corner Mount
SM-0601

3000-Series IP Camera



SPECIFICATION

	Model	CNC-335-W18-SLIR
Camera	Image Sensor	1/2.9" SONY STARVIS Sensor
	Effective Pixels	1920x1080
	Min. Illumination	0.006Lux Color / 0.003Lux BW (F1.6, AGC On, IR Off)
	S/N Ratio	> 50dB
	Shuttle	1/25 ~ 1/100,100 @50Hz
	Day & Night	Filter Change or TDN (True Day & Night)
Lens	Focal Length	18X (5.4~97mm)
	Field Of View	Horizontal : 52°~2.9° ; Diagonal : 64°~3.5°
	Aperture	F1.5 ~ F2.7
Mechanism	Pan Speed	0.5~80°/s Manual, 80°/s Preset
	Tilt Speed	0.5~80°/s Manual, 80°/s Preset
	Presets	255
	Tour	8 Tour (Each with max. 16 Presets)
	Track	4 Track (Each with max. 3min)
	Park Action	Tour, Scan, Track, Preset
Network	Ethernet	10/100 Base-T, RJ45 connector
	Max. Frame Rate	25fps @1920x1080
	Simultaneous Log-in	6
	3-Stream	Support
	SD Storage	Manual / Alarm Rec, up to 128GB, ANR
	Web Broser	IE 8~11
	User Control Level	Up to 32 Users, 3 Level (Admin, Control, View)
General	Working Environment	-30° ~ +55°C, <90° Humidity (Non-Condensing)
	Protection	IP66, 4KV surge protection
	Power	12VDC/POE 802.3at, Max. 20W (IR On)/15W (IR Off)
	Dimension	173mm(φ) x 247mm(H), 2.1kg

* Specification maybe changed without prior notice