


CNC-355-W25-SLIRT : 4MP 25X 100m IR Starlight WDR Auto Tracking Network Speedome

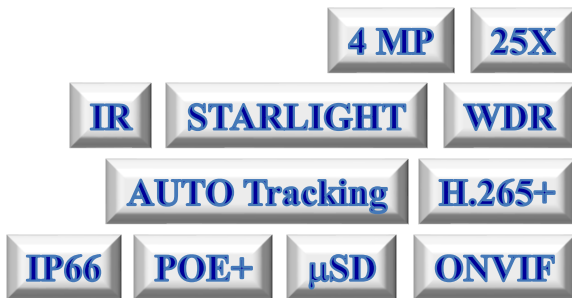

Features

Camera

- **4 Megapixel** 2560x1440 @25fps
- **H.265+** Compression
- **25x** Optical Zoom, **16x** Digital Zoom
- **Sony STARVIS Sensor**
- 120dB True **WDR**, 3D-DNR, BLC, HLC, Defog, EIS, Auto-Iris, Auto-Focus
- **SMART-IR** Range up to **100m**
- **μSD** up to 256GB with **ANR** (Automatic Network Replenishment)


Hardware

- 360° Continuous Pan
- 300 Programmable Presets
- 8 Tour (up to 16 presets each)
- 4 Pattern (up to 3min each)
- SMART Functions : **Smart Tracking Human/Vehicle, Face Capture & Recognition, Line Crossing, Area Intrusion, Item Care, Scene Change**
- Upon detecting illegal intrusion, camera will trace until the object leave the restricted area.
- Recognize Max. 30 objects/s
- Face Recognition up to 380m

Speedome Function

- 3D Positioning
- Power-Off Memory
- Scheduled Task
- Park action
- 4 Privacy Mask

Dimension

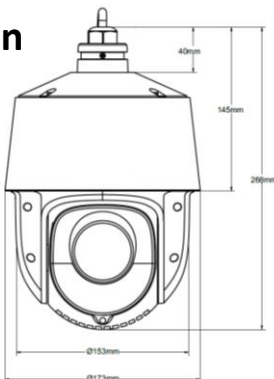

Wall Mount
SM-0808



Ceiling Mount
SM-0807



Pole Mount
SM-0501



Corner Mount
SM-0601

3000-Series IP Camera



SPECIFICATION

	Model	CNC-355-W25-SLIRT
Camera	Image Sensor	1/2.5" SONY STARVIS Sensor
	Effective Pixels	2560x1440
	Min. Illumination	0.01Lux Color / 0.002Lux BW (F1.65, AGC On, IR Off)
	S/N Ratio	> 50dB
	Shuttle	1 ~ 1/10,000 @50Hz
	Image Setting	Flip, Mirror, AGC, AWB, Brightness, Contrast etc.
	Day & Night	Filter Change or TDN (True Day & Night)
Lens	Focal Length	25X (4.8~120mm), HFOV : 55°~2.4°
	Aperture	F1.65 ~ F3.8
	Min. Distance	Wide : 1m, Tele : 1.5m
Mechanism	Pan Speed	0.5~80°/s Manual, 80°/s Preset
	Tilt Speed	0.5~80°/s Manual, 80°/s Preset
	Presets	300
	Tour	8 Tour (Each with max. 16 Presets)
	Park Action	Tour, Scan, Preset
Network	Ethernet	10/100 Base-T, RJ45 connector
	Max. Frame Rate	25fps @2560x1440
	Audio Compression	G.711 A/U
	Simultaneous Log-in	6
	3-Stream	Support
	SD Storage	Manual / Alarm Rec, up to 256 GB, ANR
	User Control Level	Up to 32 Users, 3 Level (Admin, Control, View)
General	Working Environment	-30° ~ +55°C, <90° Humidity (Non-Condensing)
	Protection	IP66, 4KV Lightning Surge Protection
	Power	12VDC/POE+, Max. 22W (IR + Heater On)
	Dimension	173mm(φ) x 247mm(H), 2.1kg

* Specification maybe changed without prior notice