

CNC-355-W4-SLIRT : 4MP 4X 50m IR Active Deterrence Auto Tracking Starlight WDR Network Speedome



Features

Camera

- **4 Megapixel** 2560x1440 @25fps
- **H.265+** Compression
- **4x** Optical Zoom, **16x** Digital Zoom
- **Sony STARVIS Sensor**
- 120dB True **WDR**, 3D-DNR, BLC, HLC, Defog, EIS, Auto-Iris, Auto-Focus
- **SMART-IR** Range up to **50m**
- **μSD** up to 256GB with **ANR** (Automatic Network Replenishment)
- Build-in **Mic & Speaker**, **Bi-directional**
- 30m Audible Warning, 7m Audio recording
- **Alarm** : 1ch in / 1ch out
- **Audio** : 1ch in / 1ch out

Hardware



- 355° Continuous Pan
- 300 Programmable Presets
- 8 Tour (up to 16 presets each)
- 4 Pattern (up to 3min each)
- SMART Functions : **Smart Tracking Human/Vehicle, Line Crossing, Intrusion**
- **Smart Tracking** of Human/Vehicle
- **Active Deterrence** : White Light flashing & Predefined Audio played
- Weatherproof IP66, Vandal Resist IK10
- PoE+ / 12VDC, Max. 18.9W

Speedome Function

- 3D Positioning
- Power-Off Memory
- Scheduled Task
- 4 Privacy Mask



Dimension



Wall Mount
CM-SD3-Wall



Pole Mount
CM-35-Pole



Corner Mount
CM-35-Corner

3000-Series IP Camera




SPECIFICATION

	Model	CNC-355-W4-SLIRT
Camera	Image Sensor	1/2.7" SONY STARVIS Sensor
	Effective Pixels	2560x1440
	Min. Illumination	0.01Lux Color / 0.002Lux BW (F1.65, AGC On, IR Off)
	S/N Ratio	> 50dB
	Shuttle	1/25 ~ 1/25,000 @50Hz
	Image Setting	Flip, Mirror, AGC, AWB, Brightness, Contrast etc.
	Day & Night	Filter Change or TDN (True Day & Night)
Lens	Focal Length	4X (4.8~12mm), HFOV : 97°~31°
	Aperture	F1.6 ~ F2.7
	Min. Distance	Wide : 0.3m, Tele : 0.5m
Mechanism	Pan Speed	0.5~80°/s Manual, 80°/s Preset
	Tilt Speed	0.5~60°/s Manual, 80°/s Preset
	Presets	300
	Tour	8 Tour (Each with max. 16 Presets)
	Schedule Task	Preset, Cruise, Trace, Reboot
Network	Ethernet	10/100 Base-T, RJ45 connector
	Max. Frame Rate	25fps @2560x1440
	Audio Compression	G.711 A/U
	Simultaneous Log-in	16
	3-Stream	Support
	SD Storage	Manual / Alarm Rec, up to 256 GB, ANR
	User Control Level	Up to 32 Users, 3 Level (Admin, Control, View)
General	Working Environment	-40° ~ +65°C, <90° Humidity (Non-Condensing)
	Protection	IP66, 6KV Lightning Surge Protection
	Power	12VDC/POE+, Max. 18.9W (IR + Heater On)
	Dimension	130mm(φ) x 162mm(H), 1.2kg

* Specification maybe changed without prior notice

CNC-355-W25-SLIRT : 4MP 25X 150m IR Starlight WDR Auto Tracking Network Speedome

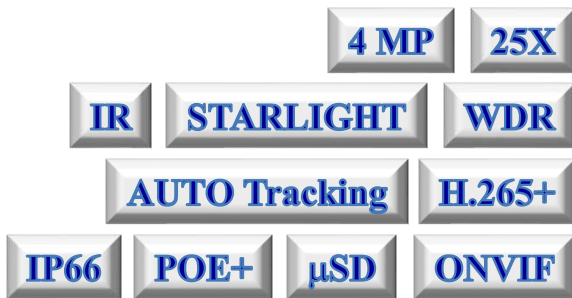

Features

Camera

- **4 Megapixel** 2560x1440 @25fps
- **H.265+** Compression
- **25x** Optical Zoom, **16x** Digital Zoom
- **Sony STARVIS Sensor**
- 120dB True **WDR**, 3D-DNR, BLC, HLC, Defog, EIS, Auto-Iris, Auto-Focus
- **SMART-IR** Range up to **100m**
- **μSD** up to 256GB with **ANR** (Automatic Network Replenishment)


Hardware

- 360° Continuous Pan
- 300 Programmable Presets
- 8 Tour (up to 16 presets each)
- 4 Pattern (up to 3min each)
- SMART Functions : **Smart Tracking Human/Vehicle, Face Capture & Recognition, Line Crossing, Area Intrusion, Item Care, Scene Change**
- Upon detecting illegal intrusion, camera will trace until the object leave the restricted area.
- Recognize Max. 30 objects/s
- Face Recognition up to 380m

Speedome Function

- 3D Positioning
- Power-Off Memory
- Scheduled Task
- Park action
- 4 Privacy Mask

Dimension

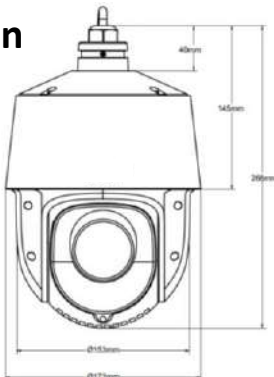

Wall Mount
SM-0808



Ceiling Mount
SM-0807



Pole Mount
SM-0501



Corner Mount
SM-0601

3000-Series IP Camera



SPECIFICATION

	Model	CNC-355-W25-SLIRT
Camera	Image Sensor	1/2.5" SONY STARVIS Sensor
	Effective Pixels	2560x1440
	Min. Illumination	0.01Lux Color / 0.002Lux BW (F1.65, AGC On, IR Off)
	S/N Ratio	> 50dB
	Shuttle	1 ~ 1/10,000 @50Hz
	Image Setting	Flip, Mirror, AGC, AWB, Brightness, Contrast etc.
	Day & Night	Filter Change or TDN (True Day & Night)
Lens	Focal Length	25X (4.8~120mm), HFOV : 55°~2.4°
	Aperture	F1.65 ~ F3.8
	Min. Distance	Wide : 1m, Tele : 1.5m
Mechanism	Pan Speed	0.5~80°/s Manual, 80°/s Preset
	Tilt Speed	0.5~80°/s Manual, 80°/s Preset
	Presets	300
	Tour	8 Tour (Each with max. 16 Presets)
	Park Action	Tour, Scan, Preset
Network	Ethernet	10/100 Base-T, RJ45 connector
	Max. Frame Rate	25fps @2560x1440
	Audio Compression	G.711 A/U
	Simultaneous Log-in	6
	3-Stream	Support
	SD Storage	Manual / Alarm Rec, up to 256 GB, ANR
	User Control Level	Up to 32 Users, 3 Level (Admin, Control, View)
General	Working Environment	-30° ~ +55°C, <90° Humidity (Non-Condensing)
	Protection	IP66, 4KV Lightning Surge Protection
	Power	12VDC/POE+, Max. 22W (IR + Heater On)
	Dimension	173mm(φ) x 247mm(H), 2.1kg

* Specification maybe changed without prior notice

CNC-3312-S – 2MP WDR SMART IR IP Dome Camera



2 Mega

WDR

Face Recognition

H.265+

Alarm

Audio

Starlight

20m IR

IP67


IK10

μSD


ONVIF

Features

- **2Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- BLC, HLC, Defog, 3DDNR, ROI etc
- 120dB True **WDR**
- **Audio** : Build-in Mic + 1 Audio In
- **Alarm** : 1 in / 1 out
- Support μSD up to 128GB
- POE / 12VC Dual Power, CVBs
- Smart Functions : **Object Removal, Line Crossing, Area Intrusion, People Counting, Crowd Density, Face Recognition**



119.00mm

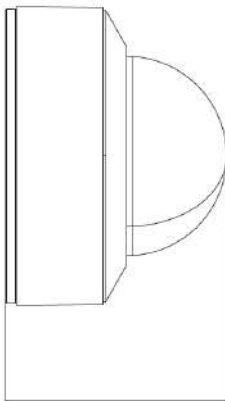

87.80mm

SPECIFICATION

Model	CNC-3312-S
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1920x1080 / 720p @25fps
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30°~+60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af / 12VDC, <7.5W
Dimension	119mm(φ) x 88mm(H), 650g



CNC-3313-MS – 2MP WDR Motorized SMART IP Dome



Features

- **2 Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom Lens
- **Auto Focus, 120dB True WDR**
- 3D-DNR, DSS, BLC, HLC, Defog, ROI
- **Audio** In/Out, **Alarm** In/Out, CVBs, Build-in **Mic**
- POE / 12VDC Dual Power
- Support **μSD** up to 128GB
- IK10 **Vandal Resist**
- Smart Functions : **Object Removal, Line Crossing, Region Intrusion, People Counting, Crowd Density, Face Capture, Flow Counting**


SPECIFICATION



141.00mm

Model	CNC-3313-MS
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1920x1080 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.8-12mm Motorized Zoom Auto Focus
Viewing Angle	103°~32° Horizontal
LEDs	IR LED Array 30~50m Distance
Day & Night	Filter Change or TDN (True Day & Night)
Video Compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Audio Compression	G711A/U
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 6Mbps
Working Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 10.5W
Dimension	141mm(φ) x 100.2mm(H), 0.89kg



CNC-3321-EC – 2MP Dual Illumination IP Turret Camera

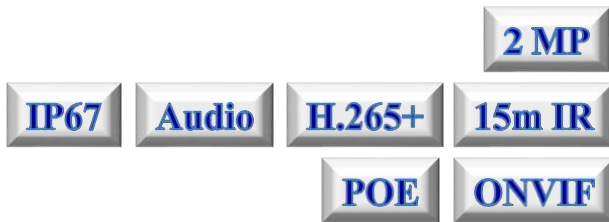

Features

- **2 Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- 2.8mm Fixed Lens
- DWDR, BLC, HLC, Defog, 3D-DNR
- **Build-in Mic**
- **Smart Supplement Light**
- 4 Users simultaneous login
- **White Light**, up to 15m
- Half Aluminum Half PVC Casing
- POE Power only
- Smart Functions : **Line Crossing**, **Area Intrusion Detection**

SPECIFICATION



Model	CNC-3321-EC
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	1920x1080
Shuttle	1/3s ~ 1/100,000s
Lens	M12 2.8mm Fixed Lens
LEDs	IR + White Light
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 15m
Network	10/100-BaseT, RJ45
Bit Rate	32Kbps ~ 4Mbps
Compression	Dual Stream : H.265+ / H.264+
W. Environment	-20° ~ +55°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant, <5.5W
Dimension	94.8mm(φ) x 82.8mm(H), 0.28kg

CNC-3322-C – 2MP Entry Level STARLIGHT IP Dome Camera



2 Mega

H.265+

STARLIGHT

μSD

IP67

20m IR

Build-in Mic



POE

ONVIF

Features

- 2 Megapixel 1920x1080 @25fps
- **H.265+** Compression
- ONVIF compatible
- **2.8mm** Fixed Lens
- **STARLIGHT** 0.006LUX w/o LED
- 3D-DNR, DWDR, HLC, BLC, ROI, Dual Stream
- 2nos LED Array, 0 Lux up to 20m
- Aluminum Casing with Epoxy
- IP67, Support μSD up to 128GB
- POE / 12VC Dual Power
- Smart functions : **Area Intrusion, Line Crossing, Object Monitoring**

SPECIFICATION

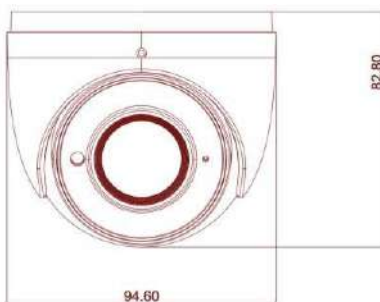

Model	CNC-3322-C
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1920x1080 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Network	10/100-BaseT, RJ45
Bit Rate	256Kbps ~ 5Mbps
Compression	2-Stream : H.265+ / H.264+ / MJPEG
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af/12VDC, < 6W
Dimension	φ94.6 x 82.8mm(H), 0.39kg

CNC-3322-LED – 2MP Full Color IP Dome Camera



2 Mega

20m Full Color

Starlight

H.265+

IP67

Audio

μSD

3-Stream



POE

ONVIF

Features


- **2 Megapixel** 19220x1080 @25fps
- **H.265+** Compression
- **2.8mm** Fixed Lens
- **120dB WDR**, BLC, HLC, 3D-DNR, ROI
- **Build-in Mic** + 1ch Audio In
- Support **μSD** up to 256GB
- 3 Users simultaneous login
- LED Array, 0 Lux 20~30m
- Network 10/100 Base-T
- **IP67 Vandal Resist** Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Intrusion, Object Removal, Scene Change**

SPECIFICATION



Model	CNC-3322-LED
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	2MP 1920x1080 @25fps
Shuttle	1s ~ 1/100,000s
Lens	M12/F1.0 2.8mm Fixed Lens
FoV	H : 99°, V : 53°, D : 116°
LEDs	2nos Warm Light LED
Min. Illumination	0 Lux 20~30m in full color
Network	10/100-BaseT, RJ45
Bit Rate	128 Kbps ~ 8 Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <5W
Dimension	94.6mm(φ) x 82.8mm(H), 0.45kg



CNC-3330-EC – 2MP Dual Illumination IP Bullet Camera

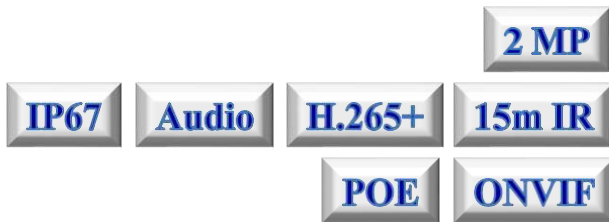

Features

- **2 Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- 2.8mm Fixed Lens
- DWDR, BLC, HLC, Defog, 3D-DNR
- **Build-in Mic**
- **Smart Supplement Light**
- 4 Users simultaneous login
- **White Light**, up to 20m
- Plastic Casing
- POE Power only
- Smart Functions : **Line Crossing**, **Region Intrusion Detection**

SPECIFICATION

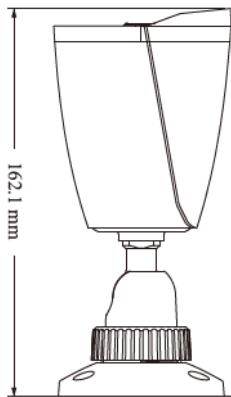

Model	CNC-3330-EC
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	1920x1080
Shuttle	1/3s ~ 1/100,000s
Lens	M12 2.8mm Fixed Lens
LEDs	IR + White Light
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m (white Light)
Network	10/100-BaseT, RJ45
Bit Rate	32Kbps ~ 4Mbps
Compression	Dual Stream : H.265+ / H.264+
W. Environment	-20° ~ +55°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant, <5.5W
Dimension	162.1mm × 74.8mm × 73.8mm, 0.25kg



CNC-3332-C – 2MP Dual LED IP Bullet Camera



Features

- **2 Megapixel** @25fps
- **H.265+** Compression
- **3.6mm** Fixed Lens
- **120dB WDR**, BLC, HLC, 3D-DNR, ROI
- **Build-in Mic** + 1ch Audio In
- Support **μSD** up to 256GB
- 3 Users simultaneous login
- LED Array, 0 Lux 20~30m
- Network 10/100 Base-T
- **IP67 Vandal Resist** Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Human/Vehicle Intrusion, Object Removal**

SPECIFICATION

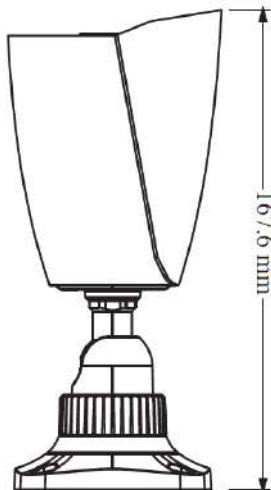

Model	CNC-3332-C
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	2MP 1920x1080 @25fps
Shuttle	1s ~ 1/100,000s
Lens	M12/F1.0 3.6mm Fixed Lens
FoV	H : 79°, V : 44°, D : 93°
LEDs	20m IR LED, 10m White LED (Full Color) upon Human/Vehicle Detection
Min. Illumination	0 Lux up to 30m
Network	10/100-BaseT, RJ45
Bit Rate	128 Kbps ~ 8 Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <5.5W
Dimension	168 (L) x 75 x 75mm, 0.38kg

CNC-3332-LED – 2MP Full Color IP Bullet Camera



2 Mega

20m Full Color

Starlight

H.265+

IP67

Audio

μSD

3-Stream



POE

ONVIF

Features

- **2 Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- **3.6mm** Fixed Lens
- **120dB WDR**, BLC, HLC, 3D-DNR, ROI
- **Build-in Mic** + 1ch Audio In
- Support **μSD** up to 256GB
- 3 Users simultaneous login
- LED Array, 0 Lux 20~30m
- Network 10/100 Base-T
- **IP67 Vandal Resist** Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Intrusion, Object Removal, Scene Change**

SPECIFICATION

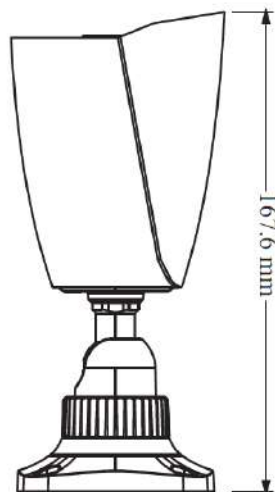


Model	CNC-3332-LED
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	2MP 1920x1080 @25fps
Shuttle	1s ~ 1/100,000s
Lens	M12/F1.0 3.6mm Fixed Lens
FoV	H : 79°, V : 44°, D : 93°
LEDs	2nos Warm Light LED
Min. Illumination	0 Lux 20~30m in full color
Network	10/100-BaseT, RJ45
Bit Rate	128 Kbps ~ 8 Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <5W
Dimension	168 (L) x 75 x 75mm, 0.38kg

CNC-3335-MS – 2MP WDR Motorized SMART IP Bullet



Features

- **2 Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom Lens
- **Auto Focus**
- **120dB True WDR**
- 3D-DNR, DSS, BLC, HLC, Defog, ROI
- LED Array, 0 Lux up to 50m
- **Audio** In/Out, **Alarm** In/Out, CVBs
- POE / 12VDC Dual Power
- Support **μSD** up to 128GB
- Smart Functions : **Object Removal, Line Crossing, Region Intrusion, People Counting, Crowd Density, Face Capture, Flow Counting**

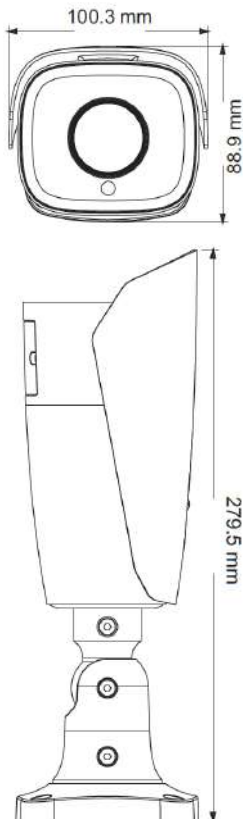

SPECIFICATION

Model	CNC-3335-MS
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1920x1080 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.8-12mm Motorized Zoom Auto Focus
Viewing Angle	103°~32° Horizontal
LEDs	IR LED Array 50~70m Distance
Day & Night	Filter Change or TDN (True Day & Night)
Video Compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Audio Compression	G711A/U
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 6Mbps
Working Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 12W
Dimension	279.5 x 100.3 x 88.9mm, 1.04kg

CNC-3336-MFR – 2MP Motorized FACE RECOGNITION IP Camera



2MP

White LED

WDR

MOTORIZED

Alarm

Audio

μSD

H.265+


ONVIF

IP67

POE

Features

- 2 Megapixel 1920x1080 @ **25fps**
- **H.265+** Compression
- **7-22mm Motorized** Lens
- 3D-DNR, HLC, BLC, Defog, ROI
- **Starlight**, True **WDR** 120dB
- 2nos White LED Array,
- 0 Lux up to 10m
- Support μSD up to 128G
- Audio 1 in 1 out, Alarm 1 in 1 out
- POE / 12VC Dual Power
- Face Recognition Distance : **4~10m**
- Face Database : **10,000**
- Face Detect & Capture : **30** faces/s
- Face Recognition : **5** faces/s

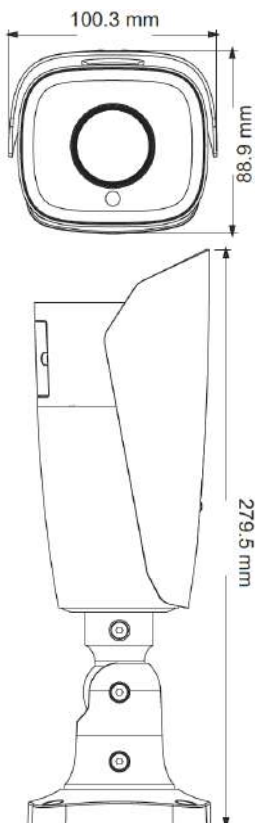

SPECIFICATION

Model	CNC-3336-MFR
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1920x1080 @50fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	7-22mm Motorized Zoom Auto Focus
Field of View	Horizontal 44° ~ 17.6°
Min. Illumination	0.0026 Lux @F1.2 (AGC On, LED Off)
Audio Compression	G711A/U
Network	10/100-BaseT, RJ45
Bit Rate	64 Kbps ~ 6 Mbps
Compression	3-Stream : H.265+ / H.264+ / MJPEG
W. Environment	-30° ~+60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af/12VDC, < 12W
Dimension	100 x 89 x 280mm(L), 1.1kg



CNC-3510-S – 4M SMART IR Dome



Features

- 4 Megapixel 2592x1520 @25fps
- **H.265+** Compression
- **2.8mm** Fixed Lens
- 3D-DNR, **120dB True WDR**, BLC, DSS, HLC, Defog, Smart IR, ROI etc
- uSD Slot up to 128GB
- 0 Lux up to 15m
- **Build-in Mic.** & Mic. In
- POE / 12VC Dual Power
- **Vandal Resistant**
- SMART Functions : Face Detect & Record, Line Crossing, Area Intrusion (Human/Vehicle), Line Crossing Target Counting

SPECIFICATION



Model	CNC-3510-S
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	4MP 2592x1520 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M12 2.8mm Fixed Lens
LEDs	2nos 850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0.0028 Lux @F1.2, AGC On/IR Off
Network	10/100-BaseT, RJ45
Bit Rate	64 Kbps ~ 8 Mbps
Compression	3-Stream, H.265 / H.264 / MJPEG
W. Environment	-30~+60°C, <90% Humidity (Non-Condensing)
Power	POE IEEE 802.3af /12VDC, < 6W
Dimension	110mm(φ) x 59.8mm(H), 0.38kg

CNC-3513-M – 4MP Motorized IP Dome



4 Mega

H.265+

30m IR

Motorized Zoom

Super Low Lux

Audio



POE

IP66

Features


- **4 Megapixel** 1688x1520 @25fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom Lens
- **Auto Focus**
- **Super Low Lux**
- DWDR, 3D-DNR, DSS, BLC, HLC, ROI, 3-stream etc
- LED Array, 0 Lux up to 30m
- Build-in Mic
- POE / 12VDC Dual Power
- Smart Functions : **Object Removal, Line Crossing, Region Intrusion**

SPECIFICATION



Model	CNC-3513-M
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1688x1520 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.8-12mm Motorized Zoom Auto Focus
Viewing Angle	72°~38°
LEDs	2nos 850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 30m (Subject to reflection)
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 10Mbps
Compression	3-Stream : H.265 / H.264 / MJPEG
Working Environment	-20° ~ +50°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 6.5W
Dimension	111.5mm(φ) x 111.5mm(H), 0.65kg



CNC-3521-EC – 4MP Dual LED IP Turret Camera

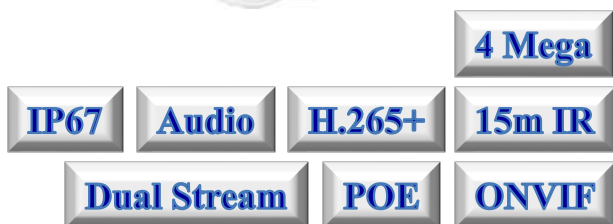

Features

- **4 Megapixel** 2560x1440 @20fps
- **H.265+** Compression
- 2.8mm Fixed Lens
- DWDR, BLC, HLC, Defog, 3D-DNR
- **Build-in Mic**
- **Smart Supplement Light**
- 4 Users simultaneous login
- **White Light** , up to 15m
- Half Aluminum Half PVC Casing
- POE Power only
- Smart Functions : **Line Crossing, Region Intrusion, Item Care**

SPECIFICATION



Model	CNC-3521-EC
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	4MP 2560x1440 @20fps
Shuttle	1/3s ~ 1/100,000s
Lens	M12 2.8mm Fixed Lens
LEDs	White Light + IR
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 15m
Network	10/100-BaseT, RJ45
Bit Rate	32Kbps ~ 4Mbps
Compression	Dual Stream : H.265+ / H.264+
W. Environment	-20° ~ +55°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant, <5.5W
Dimension	94.8mm(φ) x 82.8mm(H), 0.28kg

CNC-3522-C – 4MP Dual LED IP Dome Camera



4 Mega **Starlight**

20m IR LED

10m White LED

H.265+

IP67

Audio

μSD

3-Stream



POE

ONVIF

Features

- **4 Megapixel** 2560x1440 @25fps
- **H.265+** Compression
- **2.8mm** Fixed Lens
- **120dB WDR**, BLC, HLC, 3D-DNR, ROI
- **Build-in Mic** + 1ch Audio In
- Support **μSD** up to 256GB
- 3 Users simultaneous login
- LED Array, 0 Lux 20~30m
- Network 10/100 Base-T
- **IP67 Vandal Resist** Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Human/Vehicle Intrusion, Object Removal**

SPECIFICATION



Model	CNC-3522-C
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	4MP 2560x1440 @25fps
Shuttle	1s ~ 1/100,000s
Lens	M12/F1.0 2.8mm Fixed Lens
FoV	H : 99°, V : 53°, D : 116°
LEDs	20m IR LED (B&W) + 10m White LED (Full Color) upon Human/Vehicle Detection
Min. Illumination	0 Lux up to 30m
Network	10/100-BaseT, RJ45
Bit Rate	128 Kbps ~ 8 Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <5.5W
Dimension	94.6mm(φ) x 82.8mm(H), 0.45kg

CNC-3522-S-V2 – 4MP Network IR Water-Proof Turret Camera





Features

- **4 Megapixel** 2592x1520 @20fps
- **H.265+** Compression
- 2.8mm Fixed Lens
- **WDR**, BLC, HLC, 3D-DNR, ROI
- **Build-in Mic** x1, **Mic. In** x1
- 4 Users simultaneous login
- LED Array, 0 Lux up to 20m
- IP67 Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing**, **Area Intrusion**, **Object Removal**, **Face Recognition**, **Loitering detection**, **Human Detection** etc




SPECIFICATION

Model	CNC-3522-S-V2
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	4MP 2592x1520 @20fps
Shuttle	1/25s ~ 1/100,000s
Lens	M12 2.8mm Fixed Lens
LEDs	2nos IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Audio	Build-in Mic / Mic-in
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 8Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <5W
Dimension	94.6mm(φ) x 82.8mm(H), 0.46kg



CNC-3523-CM – 4MP Dual LED Motorized IP Dome


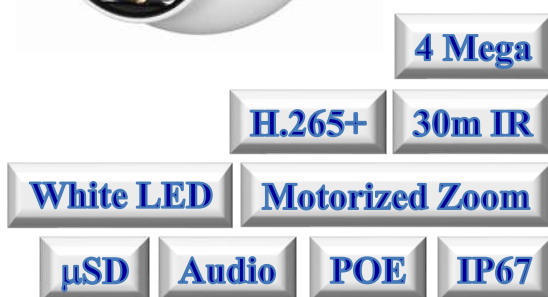


Features

- **4 Megapixel** 2560x1440 @25fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom Lens
- **Auto Focus**
- **120dB WDR**, BLC, HLC, 3D-DNR, ROI
- **Build-in Mic** + 1ch Audio In
- Support uSD up to 256GB
- LED Array, 0 Lux up to 30m
- Network 10/100 Base-T
- **IP67 Vandal Resist** Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Human/Vehicle Intrusion, Object Removal**

SPECIFICATION

Model	CNC-3523-CM
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	4MP 2560x1440 @25fps
Shuttle	1s ~ 1/100,000s
Lens	F1.4 2.8-12mm Motorized Zoom Auto Focus
FoV	H : 92°, V : 48°, D : 112°
LEDs	30m IR LED (B&W) + 20m White LED
Online Connection	3 Users simultaneous login
Min. Illumination	0 Lux up to 30m (Subject to reflection)
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 6Mbps
Compression	3-Stream : H.265 / H.264 / MJPEG
Working Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 9W
Dimension	111.6mm(φ) x 99.6mm(H), 0.66kg

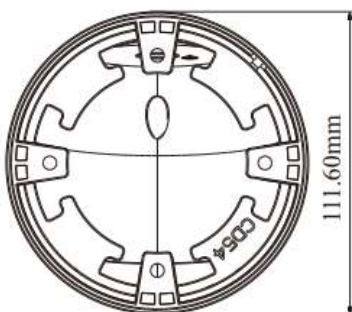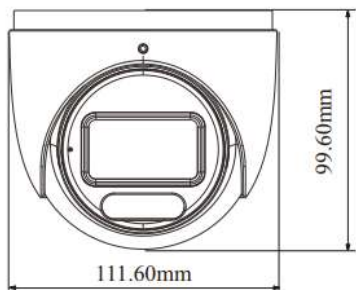

CNC-3523MP – 4MP MOTORIZED PARAMETER IP Turret Camera



4 Mega

H.265+

STARLIGHT

Audio

Flash-light

Voice Alert

Alarm

μSD

50m IR

MOTORIZED



POE

ONVIF

Features

- 4 Megapixel 2592x1520 @25fps
- **H.265+** Compression, **ONVIF**
- **2.8-12mm Motorized** Auto-Focus
- **STARLIGHT** 0.003LUX w/o LED
- 3D-DNR, **WDR**, HLC, BLC, Defog, ROI, 3-Stream
- 2nos LED Array, 0 Lux up to 50m
- Audio in, Build-in Speaker & Mic
- Alarm 1 In 1 Out
- Support μSD up to 256GB
- Aluminum Casing with Epoxy
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing/Area Intrusion** with **Human/Vehicle** detection
- 1) Camera Voice & Flash Light 2) NVR buzzer 3) Mobile Apps alert when Human detected

SPECIFICATION



Model	CNC-3523-MP
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	2592x1520 @25fps (PAL)
Shuttle	1/2s ~ 1/100,000s
Lens	2.8-12mm Motorized Zoom/Focus Auto-Iris
LEDs	2nos 850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 50m
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 8Mbps
Compression	3-Stream : H.265+ / H.264+ / MJPEG
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af/12VDC, < 12.5W
Dimension	Ø111.5 × 99.6mm, 0.64kg

* Specification maybe changed without prior notice

CNC-3523-MS – 4MP Motorized Starlight WDR AI IP Turret





Features

- **4 Megapixel** 2592x1520 @25fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom Lens **Auto Focus**
- **Starlight**, 120dB **True WDR**
- 3D-DNR, DSS, BLC, HLC, ROI, 3-stream, Smart IR, Defog etc
- Support **μSD** up to 128G
- IR LED, 0 Lux 30~50m subject to reflection
- Build-in Mic + Audio In
- POE / 12VDC Dual Power
- Smart Functions : **Object Removal, Line Crossing, Area Intrusion, Human/Vehicle Detection & Counting, Face Capture**
- AI Effective Distance :

Object	Wide (2.8mm)	Tele (12mm)
Human Detection	15m	60m
Face Recognition	1.2m	5m

SPECIFICATION



Model	CNC-3523-MS
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	2592x1520 @25fps (PAL)
Shutter	1/3s ~ 1/10,000s
Lens	2.8-12mm F1.4 Motorized Zoom Auto Focus
Viewing Angle	Horizontal 93°~31.8°, Diagonal 108°~36°
LEDs	2nos 850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0.005 Lux @F1.6 LED Off / 0 Lux LED On
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 8Mbps
Compression	3-Stream : H.265+ / H.264+ / MJPEG
Working Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af / 12VDC, Max. 9.5W
Dimension	111.5mm(φ) x 100mm(H), 0.64kg

CNC-3523-P – 4MP Active Deterrence IP Bullet Camera



4 Mega

STARLIGHT

Audio

Flash-light

Voice Alert

μSD

IP67

30m IR

H.265+


POE

ONVIF

Features


- 4 Megapixel 2592x1520 @25fps
- **2.8mm** Fixed Lens
- **STARLIGHT** 0.003LUX w/o LED
- 3D-DNR, HLC, BLC, Defog, ROI, 3-Stream
- True WDR 120dB
- 2nos LED Array, 30~50m IR Range
- Audio 1ch In, Build-in Mic. & Speaker
- Support uSD up to **256G**
- Aluminum Casing with Epoxy
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing/Area Intrusion** with **Human/Vehicle** detection
- Voice & Flash Light alert when Human/Vehicle detected

SPECIFICATION

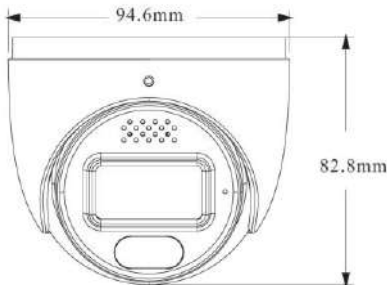

Model	CNC-3523-P
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	2592x1520 @25fps (PAL)
Shuttle	1s ~ 1/100,000s
Lens	2.8mm/F1.6 (H.FOV 100.4°, V.FOV 68°, D.VOV 108°)
LEDs	2nos LED Array. IR Range 20~30m
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 8Mbps
Compression	3-Stream : H.265+ / H.264+ / MJPEG
W. Environment	-30° ~+60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af/12VDC, < 9W
Dimension	94.6 (φ) x 82.8mm, 0.5kg



CNC-3531-EC – 4MP Dual LED IP Bullet Camera

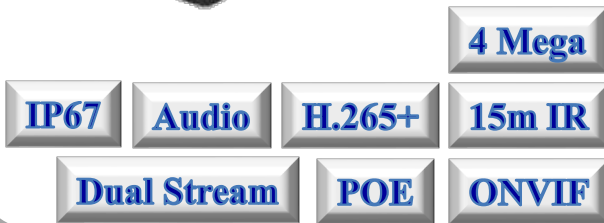

Features

- **4 Megapixel** 2560x1440 @20fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- DWDR, BLC, HLC, Defog, 3D-DNR
- **Build-in Mic**
- **Smart Supplement Light**
- 4 Users simultaneous login
- **White Light** , up to 15m
- Half Aluminum Half PVC Casing
- POE Power only
- Smart Functions : **Line Crossing, Region Intrusion Detection**

SPECIFICATION

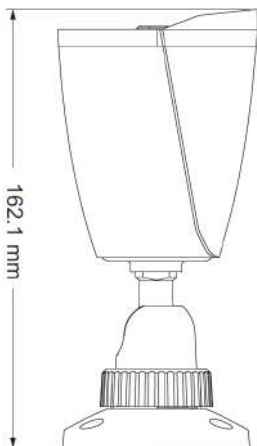

Model	CNC-3531-EC
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	4MP 2560x1440 @20fps
Shuttle	1/3s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	White Light + IR
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 15m
Network	10/100-BaseT, RJ45
Bit Rate	32Kbps ~ 4Mbps
Compression	Dual Stream : H.265+ / H.264+
W. Environment	-20° ~ +55°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant, <5.5W
Dimension	162.1 x 74.8 x 73.8mm, 0.25kg

CNC-3532-C – 4MP Dual LED IP Bullet Camera



4 Mega **Starlight**

20m IR LED

10m White LED

H.265+

IP67

μSD

3-Stream



POE

ONVIF

Features

- **4 Megapixel** 2560x1440 @25fps
- **H.265+** Compression
- **3.6mm** Fixed Lens
- **120dB WDR**, BLC, HLC, 3D-DNR, ROI
- **Build-in Mic** + 1ch Audio In
- Support **μSD** up to 256GB
- 3 Users simultaneous login
- LED Array, 0 Lux 20~30m
- Network 10/100 Base-T
- **IP67 Vandal Resist** Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Human/Vehicle Intrusion, Object Removal**

SPECIFICATION

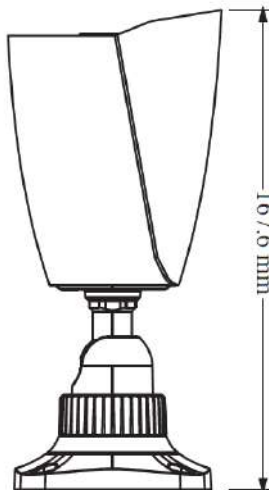

Model	CNC-3532-C
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	4MP 2560x1440 @25fps
Shuttle	1s ~ 1/100,000s
Lens	M12/F1.0 3.6mm Fixed Lens
FoV	H : 79°, V : 44°, D : 93°
LEDs	20m IR LED, 10m White LED upon Human/Vehicle Detection
Min. Illumination	0 Lux up to 30m
Network	10/100-BaseT, RJ45
Bit Rate	128 Kbps ~ 8 Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <5.5W
Dimension	168 (L) x 75 x 75mm, 0.38kg


CNC-3532-S – 4MP WDR SMART IR IP Bullet Camera



Features

- **4 Megapixel** @25fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- BLC, HLC, Defog, 3DDNR, ROI etc
- 120dB True **WDR**
- **Audio** : 1 Audio In
- Support μ SD up to 128GB
- POE / 12VC Dual Power, CVBs
- Smart Functions : **Object Removal, Line Crossing, Area Intrusion, People Counting, Crowd Density, Face Recognition**

SPECIFICATION

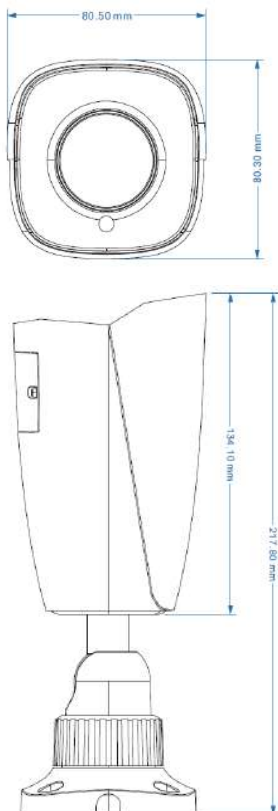

Model	CNC-3532-S
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1688x1520 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30°~+60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af / 12VDC, <7.5W
Dimension	80.5 x 80.3 x 218mm(L), 0.5kg

CNC-3533-CM – 4MP Motorized IP Bullet Camera



4 Mega

Full Color

H.265+

50m IR

Motorized Zoom

Super Low Lux



POE

IP67

Features

- **4 Megapixel** 2688x1520 @25fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom **Auto Focus** Lens
- **Super Low Lux**
- **30~50m** IR Range
- **Full Color upon Human/Vehicle detected**
- DWDR, 3D-DNR, DSS, BLC, HLC, ROI, 3-stream etc
- POE / 12VDC Dual Power
- Smart Functions : **Object Removal, Line Crossing, Area Intrusion, Scene Change**

SPECIFICATION

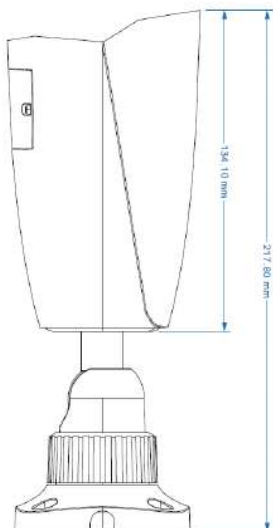

Model	CNC-3533-CM
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	2688x1520 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.8-12mm Motorized Zoom Auto Focus
Viewing Angle	72°~38°
LEDs	2nos 850nm IR LED Array / 1no White LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 50m (Subject to reflection)
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 10Mbps
Compression	3-Stream : H.265 / H.264 / MJPEG
Working Environment	-20° ~ +50°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 6.5W
Dimension	80.5 x 80.3 x 218mm(L), 0.5kg

CNC-3533-MS – 4MP Motorized Starlight WDR AI IR IP Camera





Features

- **4 Megapixel** 2592x1520 @25fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom Lens **Auto Focus**
- **Starlight**, 120dB **True WDR**
- 3D-DNR, DSS, BLC, HLC, ROI, 3-stream, Smart IR, Defog etc
- Support **μSD** up to 128G
- LED Array, 0 Lux 30~50m subject to reflection
- 1ch Audio In
- POE / 12VDC Dual Power
- Smart Functions : **Object Removal, Line Crossing, Area Intrusion, Human/Vehicle Detection & Counting, Face Capture**
- AI Effective Distance

Object	Wide (2.8mm)	Tele (12mm)
Human Detection	15m	60m
Face Recognition	1.2m	5m

SPECIFICATION

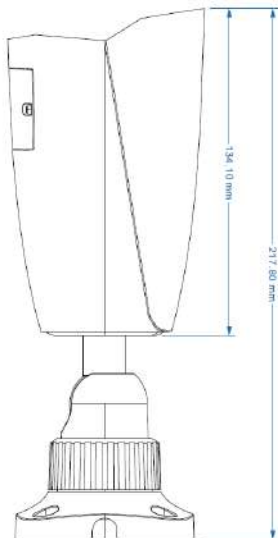

Model	CNC-3533-MS
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	2592x1520 @25fps (PAL)
Shuttle	1/3s ~ 1/10,000s
Lens	2.8-12mm Motorized Lens
Viewing Angle	Horizontal 93°~31.8°, Diagonal 108°~36°
LEDs	850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0.005 Lux @F1.6 LED Off / 0 Lux LED On
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 8Mbps
Compression	3-Stream : H.265+ / H.264+ / MJPEG
W. Environment	-30°~+60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af / 12VDC, <9.5W
Dimension	80.5 x 80.3 x 217.8mm(L), 0.69kg


CNC-3533-S – 4MP WDR SMART IR IP Bullet Camera



Features

- **4 Megapixel** @25fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- BLC, HLC, Defog, 3DDNR, ROI etc
- 120dB True **WDR**
- **Audio** : 1 Audio In
- Support μ SD up to 128GB
- POE / 12VC Dual Power, CVBs
- Smart Functions : **Object Removal, Line Crossing, Area Intrusion, People Counting, Crowd Density, Face Recognition**

SPECIFICATION

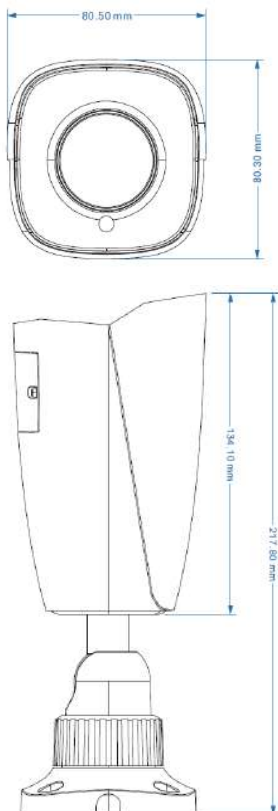

Model	CNC-3533-S
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1688x1520 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30°~+60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af / 12VDC, <7.5W
Dimension	80.5 x 80.3 x 218mm(L), 0.5kg

CNC-3535-MP – 4MP MOTORIZED PARAMETER IP Bullet Camera



4 Mega

H.265+

STARLIGHT

Audio

Flash-light

Voice Alert

Alarm

μSD

IP67

50m IR

MOTORIZED


POE

ONVIF

Features

- 4 Megapixel 2592x1520 @25fps
- **H.265+** Compression, **ONVIF**
- **2.8-12mm Motorized** Auto-Focus
- **STARLIGHT** 0.003LUX w/o LED
- 3D-DNR, **WDR**, HLC, BLC, Defog, ROI, 3-Stream
- 2nos LED Array, 0 Lux up to 50m
- Audio 1 In 1 Out, Build-in Speaker
- Alarm 1 In 1 Out
- Support μSD up to 256GB
- Aluminum Casing with Epoxy
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing/Area Intrusion** with **Human/Vehicle** detection
- 1) Camera Voice & Flash Light 2) NVR buzzer 3) Mobile Apps alert when Human detected

SPECIFICATION

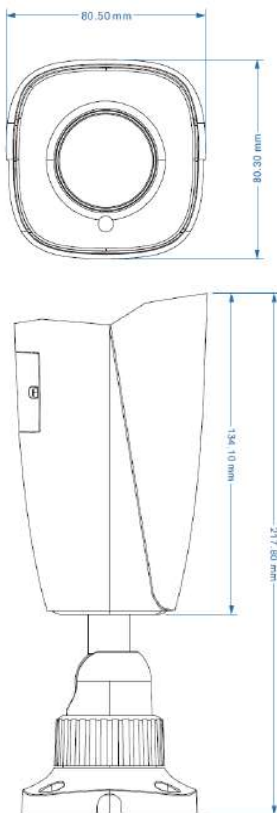

Model	CNC-3535-MP
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	2592x1520 @25fps (PAL)
Shuttle	1s ~ 1/100,000s
Lens	2.8-12mm Motorized Zoom/Focus Auto-Iris
LEDs	2nos 850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 50m
Network	10/100-BaseT, RJ45
Bit Rate	256Kbps ~ 8Mbps
Compression	2-Stream : H.265+ / H.264+ / MJPEG
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af/12VDC, < 11W
Dimension	80.5 x 80.3 x 218mm(L), 0.65kg

* Specification maybe changed without prior notice



CNC-3535-MS – 4MP WDR Motorized SMART IP Bullet



Features

- **4 Megapixel** @25fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom Lens
- **Auto Focus, 120dB True WDR**
- 3D-DNR, DSS, BLC, HLC, Defog, ROI
- **Audio** In/Out,
- **Alarm** In/Out, CVBs
- POE / 12VDC Dual Power
- Support **μSD** up to 128GB
- IK10 **Vandal Resist**
- Smart Functions : **Object Removal, Line Crossing, Region Intrusion, People Counting, Crowd Density, Face Capture, Flow Counting**

SPECIFICATION

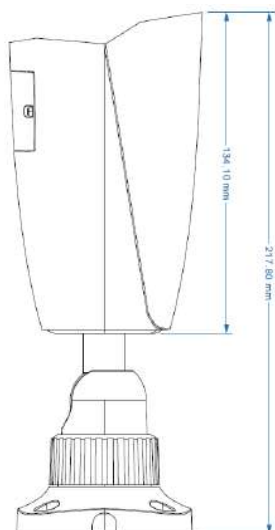

Model	CNC-3533-MS
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1688x1520 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.8-12mm Motorized Zoom Auto Focus
Viewing Angle	103°~32° Horizontal
LEDs	IR LED Array 30~50m Distance
Day & Night	Filter Change or TDN (True Day & Night)
Video Compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Audio Compression	G711A/U
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 6Mbps
Working Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 10.5W
Dimension	80.5 x 80.3 x 218mm(L), 500g

CNC-3535-P – 4MP Active Deterrence IP Bullet Camera



4 Mega

STARLIGHT

Audio

Flash-light

Voice Alert

Alarm

μSD

IP67

30m IR

H.265+


POE

ONVIF

Features

- 4 Megapixel 2592x1520 @25fps
- **3.6mm** Fixed Lens
- **STARLIGHT** 0.003LUX w/o LED
- 3D-DNR, **WDR**, HLC, BLC, Defog, ROI, 3-Stream
- 2nos LED Array, 30~50m IR Range
- Audio 1ch In, Build-in Speaker
- Alarm 1ch In / 1ch Out
- Support uSD up to **256G**
- Aluminum Casing with Epoxy
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing/Area Intrusion** with **Human/Vehicle** detection
- Voice & Flash Light alert when Human/Vehicle detected


SPECIFICATION

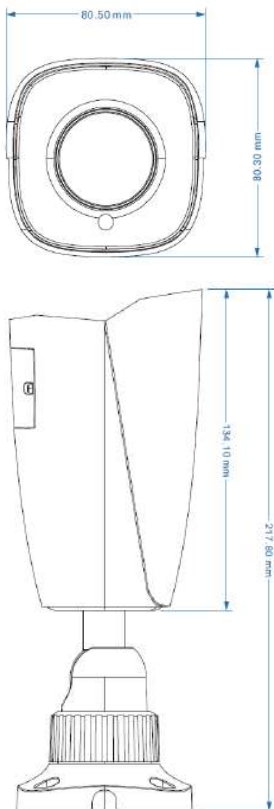

Model	CNC-3535-P
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	2592x1520 @25fps (PAL)
Shuttle	1s ~ 1/100,000s
Lens	3.6mm/F1.6 (H.FOV 80.6°, V.FOV 50.6°, D.FOV 88°)
LEDs	2nos LED Array. IR Range 30~50m
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 30m
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 8Mbps
Compression	3-Stream : H.265+ / H.264+ / MJPEG
W. Environment	-30° ~+60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af/12VDC, < 12.5W
Dimension	80.5 x 80.3 x 218mm(L), 0.7kg

* Specification maybe changed without prior notice


CNC-3537-M-LPR – 4MP License Plate Recognition Camera

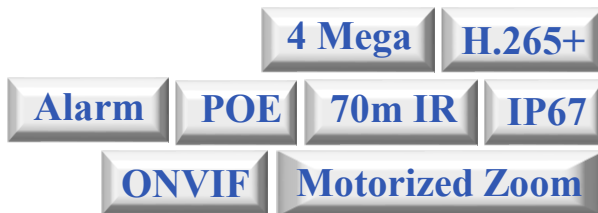

Features

- 4 Megapixel 2688x1520 @30fps
- **H.265+** Compression, **ONVIF**
- **8-32mm Motorized** Auto-Focus
- True Day/Night, 0.001LUX w/o iR
- 3D-DNR, **WDR**, HLC, BLC, Defog, ROI
- 3-Stream, **P2P**
- Support **μSD** up to 256GB
- Audio 1 In 1 Out
- Alarm 1 In 1 Out
- Aluminum Alloy Body
- POE / 12VDC Dual Power
- Smart Functions : **License Plate Capture**
- Store up to **10,000** database License Plate (32ch NVR Device)

SPECIFICATION

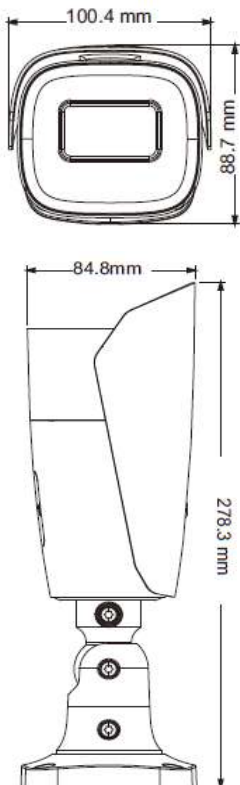

Model	CNC-3337-M-LPR
Image Sensor	1/1.8" progressive scan CMOS Sensor
Resolution	2688x1520 @30fps
Shuttle	1/1s ~ 1/100,000s
Lens	8-32mm Motorized Zoom/Focus Auto-Iris
Field of View	H:100°~48.5°; V: 54°~26.5°; D: 119°~55.8°
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 70m
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 8Mbps
Compression	3-Stream : H.265+ / H.264+ / MJPEG
W. Environment	-30° ~+60°C, <95° Humidity (Non-Condensing)
Power	12VDC: <12W , POE: < 10W , 24VAC: < 10W
Dimension	278.3 x 100.4 x 88.7mm, 1.2kg


CNC3561 – 4.5MP IR 360° Fisheye Camera



Features

- **4.5 Megapixel** 2160x2160@25fps
- **H.265+** Compression
- **360° Ceiling** Mount / Desktop or **180° Wall** Mount
- 3D-DNR, DWDR, DSS, HLC, BLC etc
- ROI Coding, 3-Stream, P2P
- Day&Night by Filter Change (TDN)
- IRLED Array, 0 Lux up to 20m
- CVBs output, Hardware Reset
- Support uSD card up to 128GB
- Mic. in x1 & Speaker out x1
- Working with NVR **HN3232 / 3432 / 3832 / 3864 / 16128**
- POE / 12VDC Dual Power

SPECIFICATION

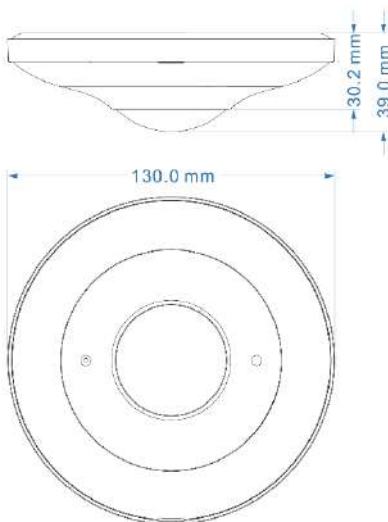

Model	CNC3561
Image Sensor	1/2.9" progressive scan CMOS Sensor
Resolution	2160x2160 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	1.07mm F2.5 Fixed Lens
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m (Subject to reflection)
Network	10/100-BaseT, RJ45
Audio Compression	G.711A / G.711Mu, 8~48 Kbps
Alarm	1 in & 1 out
Compression	3-Stream : H.265+ / H.265 / H.264+ / H.264
Working Environment	-20°~+50°C, <90° Humidity (Non-Condensing)
Power	POE 802.3af compliant/12VDC, Max. 12W
Dimension	130mm(φ) x 39mm(H), 432g

CNC-3822-C – 8MP H.265+ WDR IR IP Dome Camera



H.265+

8 Mega

IP67

Audio

WDR

20m IR

μSD

3-Stream



POE

ONVIF

Features

- **8 Megapixel** 3840x2160 @20fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- **WDR**, BLC, HLC, 3D-DNR, ROI
- **Build-in Mic** x1
- 4 Users simultaneous login
- LED Array, 0 Lux up to 20m
- IP67 Aluminum Casing
- POE / 12VC Dual Power
- Smart Functions : **Line Crossing, Area Intrusion, Object Removal, Human Detection** etc

SPECIFICATION



Model	CNC-3822-C
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	8MP 3840x2160 @20fps
Shutter	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	2nos IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Audio	Build-in Mic
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <5W
Dimension	94.6mm(φ) x 82.8mm(H), 0.45kg

CNC-3823M – 8MP Motorized WDR IR IP Camera



8 Mega

H.265+

WDR

ONVIF

30m IR

Motorized Lens



POE

IP67

Features

- **8 Megapixel** 3840x2160 @20fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom Lens
- **Auto Focus**
- **WDR**, 3D-DNR, DSS, BLC, HLC, Defog, ROI, 3-stream etc
- 0 Lux up to 30m
- Simultaneous Login : 6 users
- POE / 12VDC Dual Power
- Smart Functions : **Line Crossing, Area Intrusion, Scene Change**

SPECIFICATION



Model	CNC-3823-M
Image Sensor	1/2.7" progressive scan CMOS Sensor
Resolution	3840x2160@20fps 5MP / 4MP / 3MP / 2MP / 720p @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.8-12mm Motorized Zoom Auto Focus
Viewing Angle	80°~38°
LEDs	2nos 850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 30m (Subject to reflection)
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 10Mbps
Compression	3-Stream : H.265 / H.264 / MJPEG
Working Environment	-20° ~ +50°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, <9.5W
Dimension	111.5mm(φ) x 111.5mm(H), 0.65kg



CNC-3832-C – 8MP Dual Illumination IR IP Bullet Camera



Features

- **8 Megapixel** @20fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- **Smart Supplement Light**
- **WDR**, BLC, HLC, 3D-DNR, ROI
- 4 Users simultaneous login
- White Light + IR, 0 Lux up to 30m
- Support μSD up to 256G
- IP67 Aluminum Casing
- Support **P2P** function
- Smart Functions : **Line Crossing**, **Area Intrusion**

SPECIFICATION

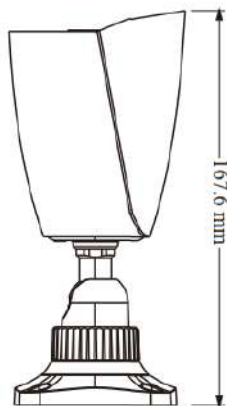

Model	CNC-3832-C
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	3840 x 2160 @20fps (PAL)
Shutter	1/3s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	White Light + IR up to 20~30m
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 30m
Audio	Build-in Mic
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 12Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30° ~ +60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 7W
Dimension	75 x 74.6 x 167.6mm(L), 0.42kg


CNC-3833-CM – 8MP Motorized IP Bullet Camera



Features

- **8 Megapixel** @20fps
- **H.265+** Compression
- **2.8~12mm Motorized** Zoom **Auto Focus** Lens
- **Super Low Lux**
- **30~50m** IR Range
- **Full Color upon Human/Vehicle detected**
- DWDR, 3D-DNR, DSS, BLC, HLC, ROI, 3-stream etc
- POE / 12VDC Dual Power
- Smart Functions : **Object Removal, Line Crossing, Area Intrusion, Scene Change**

SPECIFICATION

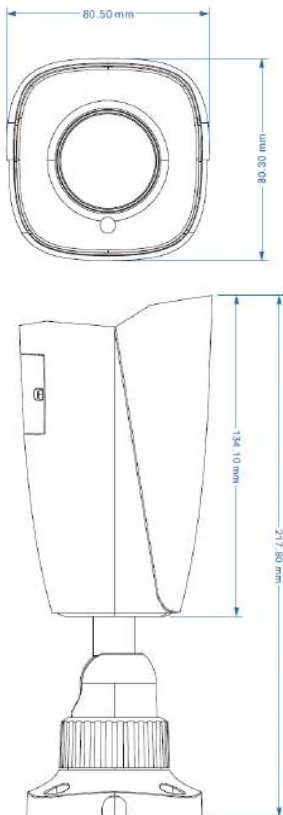

Model	CNC-3833-CM
Image Sensor	1/2.7" progressive scan CMOS Sensor
Resolution	3840 x 2160 @20fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.8-12mm Motorized Zoom Auto Focus
Viewing Angle	72°~38°
LEDs	2nos 850nm IR LED Array / 1nos White LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 50m (Subject to reflection)
Network	10/100-BaseT, RJ45
Bit Rate	64Kbps ~ 10Mbps
Compression	3-Stream : H.265 / H.264 / MJPEG
Working Environment	-20° ~ +50°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af compliant/12VDC, Max. 6.5W
Dimension	80.5 x 80.3 x 218mm(L), 0.5kg