

## XC2313M-SL – 1080p 4in1 STARLIGHT Motorized WDR IR Dome



1080p 4in1

5x Motorized Zoom

30m IR

STARLIGHT



UTC

WDR

### Features

- 2 Megapixel **STARLIGHT** Sensor : 5x sensitivity than normal sensor
- Video output selectable :  
**1080p AHD** or **TVI** or **CVI**  
**700TVL Analog**
- **2.7~13.5mm Motorized AF** Lens
- 0 Lux up to 30m
- 3D-DNR, **WDR**, DSS, Defog etc
- TDN (True Day & Night)
- **UTC** & Joystick OSD control
- **Aluminum Casing** with ABS Base
- Suitable for Wall / Ceiling Mount
- Best performance <300m by RG6

### DIMENSION

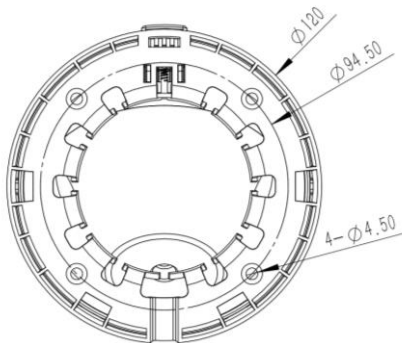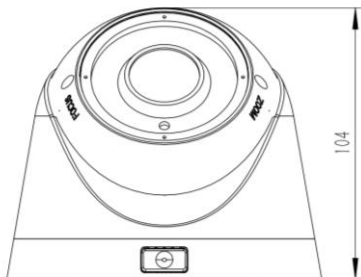

### SPECIFICATION

Model	XC2313M-SL
Image Sensor	1/2.8" 2.1MP STARVIS Sensor
Resolution	1920x1080 Pixels
Shuttle	1/25s ~ 1/100,000s
Lens	M14 2.7-13.5mm Motorized AF Lens
Video Output	1080p@25fps AHD/TVI/CVI or Analog
Day & Night	Filter Change or True Day&Night (TDN)
Min. Illumination	0 Lux up to 30m
LEDs	24nos 14u 850nm LED Arrays
S/N Ratio	>52 DB
Casing	Aluminum with Epoxy Powder Coating
W. Environment	-10° ~ +55°C, Non-Condensing
Power	12VDC, Max. 500mA
Dimension (mm)	104mm x 120mm( $\phi$ ), 0.6kg

\* Specification maybe changed without prior notice